

ENGINE POWERED SCISSOR LIFT

JLG 40RTS (14M HEIGHT)



GLOBEN, S.L.
C/Germán Bernácer 95
Elche Parque Empresarial
Apdo. De Correos 5154-03203 **ELCHE** (Alicante)
Telf. **966 299 599** · Móvil 673 823 100
Fax 965 680 523 · info@globen.es
www.globen.es


DIMENSIONS

A. Platform height (elevated)	12.04 m
B. Platform height (lowered)	1.73 m
C. Platform railing height¹	1.10 m
D. Overall height (rails lowered)¹	2.49 m
E. Platform size	1.80 m x 3.20 m
F. Platform extension²	1.23 m
G. Overall width	2.29 m
H. Overall length	3.78 m
I. Wheelbase	2.50 m
J. Ground clearance	0.30 m
Platform capacity	455 kg
Capacity with dual extension	340 kg
Capacity on platform extension	165 kg
Lift/lower time	65/35 sec.
Maximum drive height	8 m
Platform extension front	(manual optional)
Weight³	4500 kg
Speed 4x2x2	5.6 km/h
Speed 4x4x2 (optional)	4.5 km/h
Gradeability 4x2x2	35%
Gradeability 4x4x2 (opcional)	45%
Turning radius (intern) (simple direction)	3.81 m
Turning radius (intern) (double direction)	1.68 m
Turning radius (extern) (simple direction)	5.51 m
Turning radius (extern) (double direction)	3.43 m
Axle (optional)	0.20 m
Tires	12 x 16.5
Diesel fuel engine	20 kW Deutz F2L1011
Fuel tank capacity	56.8 L
Hydraulic reservoir	75.7 L

¹ With the optional sliding side increases the height at 0.08 m.

² Optionally 40RTS have a manual sliding side 1.23 m.

³ Weights and dimensions may vary due to each country's regulations or the options.

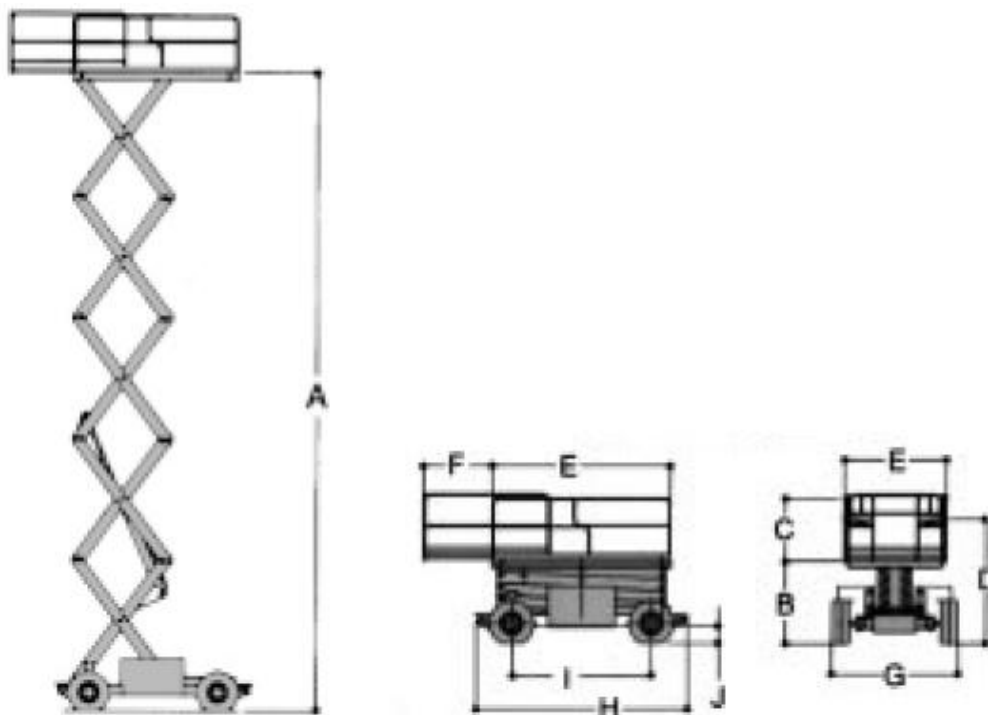

GLOBEN